"Quick Attach"
Pro Infield Groomers

Designed for Infields

Innovative
Convenience

has a "New Standard"

"We Make Dirt Look Good!" TM

PERFORMANCE You Need

CONVENIENCE You Want

Legendary Pro Infield Groomer now available in Direct Mount "Quick Attach" models.

Attach Direct to the rear of your Tow Vehicle.

Legendary

"Quick Attach". No frame. No wheels



JD Gator TX

Heying Company Alton IA 51003 Made in USA



2" Receivers



3 Pt. Lift

"Helping Those Who Help Others Play"



PERFORMANCE You Need

Designed for Infields

PR72

Legendary Performance. Yes, It Levels Infields. Pro Infield Groomer. Tongue Towed.

6 Different Operator Lift Systems available. Pull with variety of tow vehicles.

Pro Infield Groomer

CONVENIENCE You Want

Want the **Convenience** of a Rear Direct Attached Groomer?



2" Receivers "Quick Attach"

Side by Sides & UTV's PR72-QR & PR90-QR Models.

"Latch, Lock & Lift" Svstem.



JD Gator TX "Quick Attach"

JD Gator TX PR72-QX & PR90-QX Models.

"Latch, Lock & Lift" System.

I nnovation never stops





3 Pt. Lift Cat 0 / 1

Sub Compact Tractors. Use with or without a quick coupler.PR72-TP and PR90-TP Models.

Heying Groomer Company

Alton, IA 51003 Ph. 712.756.8847 www.HeyingCompany.com





2" Receiver "Quick Attach" with easy "Latch & Lock" Lift System.

PR72-QR PR90-QR

JD Gator TX "Quick Attach" with easy "Latch & Lock" Lift System.


PR72-QX PR90-QX

Patent Pending Design. Exclusive Engineering.

Attach to your Tow Vehicle. No Frame. No Wheels. Easy Travel.

All Direct Attached Models Available in 72" or 90" Wide Models.

3 Pt. Lift for Sub Compact Tractors

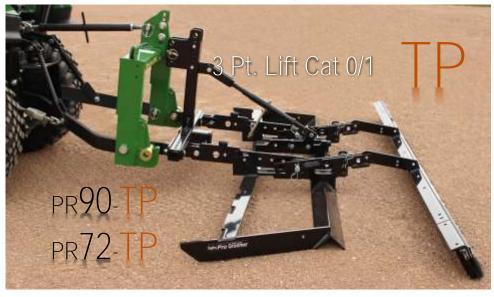



Levels and Smoothens

infields better than any other groomer on the market.

Legendary

Pro Groomer Levels Infields.

Front and Rear Blades Cut 100% of the Surface. Blades cut off high areas, carry material along as it grooms and drops material in low areas where it's needed.

PR72 Pro Infield Groomer

Rear Blade

Pro Groo

Front Blade

2 Bladed Leveling Implement

Designed for Infields. **Unmatched**

Engineering



PR72 Pro Infield Groomer

Level Smooth Consistent Top Firm Underneath what every infield needs. All in one step.

Infields should always be level and smooth. Smooth is easy. Leveling is much more difficult and requires special engineering. Player and coaches want a consistent top surface with firm footing underneath. This can only be achieved with a perfectly designed implement that "locks into a leveling position and stays there so it's not allowed to float". The implement must cut off high areas, carry material along, and release it into low areas where it's needed. The PR72 Pro Groomer leveling implement constantly mixes the top portion of infield material during the grooming process while not disturbing the underneath firm footing that's desired.

The PR72 Pro Infield Groomer also Removes Weeds and Deters Water Puddling.

You can't level infields with the wrong tools. Floating implements do not level infields (they float up over high areas and drop down into low areas). Drag Mats do not level infields. Tines do not level. Bunker Rakes do not level infields. Nail Drags don't level. This list goes on.



Removes Weeds and Deters Water Puddling

better than any other groomer on the market.

How to remove weeds from my infields

There's no better machine than the PR72 Pro Groomer to remove weeds! While You Groom.

Can you find another groomer that pulls weeds like this... while you groom?



Can your infield equipment do this?



Weed growth is common on infields. They're unsightly during the season and a downright nuisance in the off season. You won't find another groomer that removes weeds like the PR72 Pro Groomer.

The "original Pro Groomer". Don't be fooled by other brands that call their machine the "Pro". Ours was the first, and the original, Pro Infield Groomer.

Removes and Controls Weeds. Deters Water Puddling.



2" Receiver "Quick Attach" with easy "Latch & Lock" Lift System.




Direct attach behind


2 Inch Receiver UTV's & Side by Sides

Exclusive "Latch, Lock & Lift" System. 2-Switch Wiring System giving the user front dash and rear under box lift controls.

No Tools needed to attach or disconnect groomer. Tow System stays on the Tow Machine.

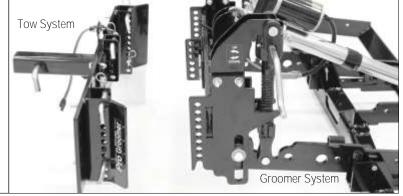

Attaches in 30 Seconds, No Tools Needed.







Front Dash Mounted Switch.



includes 2 Switch Wiring System

Includes all wiring necessary and 2 Switches for Dual Control.



(use when attaching and disconnecting).



TX JD Gator "Quick Attach" with easy "Latch & Lock" Lift System.

Heavy Duty Actuator Exclusive "Quick Attach". Easy Attach and Disconnect.

Standard 72" and New BigBoy 90" Models.

Numerous Optional Attachments available.

Rear 72" or 90" Smoothing Broom (90" Broom Shown)

PR90-QX is Shown

One of a Kind.

TX Series Pro Groomers for newer style JD Gator TX Vehicles with a rear 1-1/4" Receiver Hitch.



JD Gator TX "Quick Attach"

66" or 84" Exclusive Leveler Implement Design. Blades cut 100% of graded surface. (84" Leveler Shown).


Direct attach to John Deere Gator TX.

Directly attaches to the rear axle system & 1-1/4" receiver. Exclusive "Latch, Lock & Lift" System.


2-Switch Wiring System giving the user front dash and rear under box lift controls.

No Tools needed to attach or disconnect. Tow System stays on the Vehicle.

Note: this design connects to newer versions of Gator TX vehicles with 1-1/4" rear receiver hitch

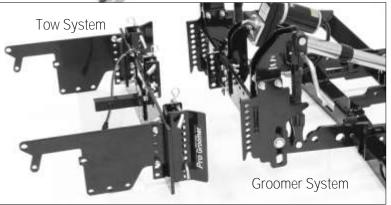

Attaches in 30 Seconds, No Tools Needed.







Front Dash Mounted Switch.



includes 2 Switch Wiring System

Includes all wiring necessary and 2 Switches for Dual Control.




(use when attaching and disconnecting).



"Adjustable 3 Pt. Lift System"




All 3 pt. lift frames (except our special design) are specific to one style of use. They force a user to decide whether or not they plan to use a tractor quick hitch (or quick coupler) or no quick coupler. In other words they do not adjust to be used either way. We've designed a 3 pt. lift frame that allows either setup. Our adjustable brackets can be moved on the frame and allow the user to decide if they want to connect directly to the link arms (no coupler) of if they want to use a guick coupler.



One of a Kind Adjustable 3 Pt. Frame.

You choose if you want to use a quick coupler or no quick coupler.

3 Point Lift. Cat 0 / 1







Turnbuckle provides groomer "pitch adjustment". Heavy Duty.

Heying Company Alton, Iowa 51003 Ph. 712.756.8847 Fax 712.756.8849

www.HeyingCompany.com www.Infield-Drag.com www.InfieldGroomer.com

Upper brackets are adjustable to be set where user needs them






Infields Need to be Smooth and Level!

Making an infield smooth is relatively easy. Leveling Infields requires advanced engineering.

Pro Groomer "Leveling Implement" Stands Apart

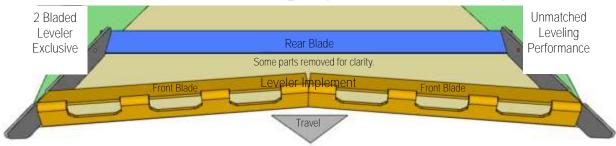

Blades cut 100% of the surface while grooming.


Unlike other machines our Pro Groomer leveling blades cut 100% of the surface. Does not leave areas un-cut. Two Blades level better than one.


Pro Groomer Leveler Implement "Locks Into Position" to Level.

Floating Implements, such as steel drag mats, simply cannot level an infield. They might help smoothen but they ride up over high areas (don't cut it off) and sink down into low areas (tend to drag material out).

In order for an implement to level it must "Lock into Place" and not float. Our Leveler Implement travels over material and cuts high areas, carries material along, and releases it into low areas.

QR & QX Models use Front Height Adjust System. TP uses 3 Pt. Lift System.

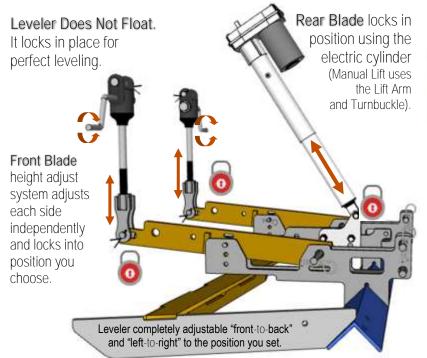



The PR72 Pro Infield Groomer is Engineered to Level.

Leveler Implement + Adjustment System produces "Level" and "Smooth" Infields.

Leveler Does Not Float! Each side of the front blade adjusts independently to keep the implement level left to right and to adjust the height of the front blade. The rear blade adjusts and locks into position using the rear electric cylinder (Manual Lift uses the Lift Arm and Turnbuckle to adjust rear blade).



Optional Accessories Numerous Optional Accessories Rock Basket Drag Mat Hard Tooth Chisel Scarifier Numerous other optional attachments not shown in this picture.

PRCH-5825 Chisel Scarifier

Chisel Scarifier.

More effective on really hard infields than the Spring Tine Scarifier. Pulverizes & shatters hard-compacted infields to improve playability. Exclusive abrasion resistant steel teeth. Completely depth adjustable. Mounts to rear of Leveler implement. Rear Broom and Drag Mat Drag can be mounted behind Chisel



to help break up chunks and smoothen. Teeth are easy to replace.

In-Season. Should only be used to pulverize the very top portion of infields (1/4" to 1/2" or so) during the season.

Off-Season. Capable of depth up to 2-3/4" to mix, remove weeds, etc. but should never be used deep enough to disturb infield layers.

Chisel Scarifier cannot be used while grooming. It is a separate process. Infield layers are very important. You should never penetrate too deep into an infield and disturb the layers. If the Chisel was used

while grooming then it could mask, or hide, what is actually being done to the infield. So, for infield safety, we design the Chisel Scarifier process to be a separate process from grooming.

Also see Drag Mat that helps break up chunks created by the Chisel Scarifier.



Spring Tine Scarifier (PRST-7211 PR72) (PRST-9012 PR90)

Spring Tine Scarifier.

Mounts in front of Leveler.


Completely adjustable.

Can be used while grooming - which is the only advantage it has over the chisel scarifier for pulverizing.

Flexible Tines are not as effective breaking up hard infields as the hard tooth chisel. For customers who want to be able to lightly pulverize while they groom.

Includes one row of adjustable spring tines and tine adjustment system.

Note: Customers with extremely hard infields (especially infields with sand mixtures) should consider the hard tooth Chisel Scarifier which is more effective on hard infields.



ALDM-7836 ALDM-8436 ALDM-7236 Drag Mats



Drag Mats 3 Sizes Available.

72" wide x 36" Deep 78" wide x 36" Deep 84" wide x 36" Deep

Drag Mat Option includes our exclusive brackets that pull the mat (during use) and store the mat (rolled up) during travel off the field. No tools needed to adjust or remove the mat. Mats are most useful when breaking up hard infields (which creates chunks).

Drag Mat drops into square sections. Locked in place with flip down locks.



Mats can be adjusted left to right in 1.00" increments, in the brackets, if desired. Roll up the drag mat and store in

top of brackets


for hauling.



ALDM-1000 Brackets Only

Order this option if you wish to use your own Drag Mat in our exclusive Drag Mat Brackets.

Brackets only. No Drag Mat included. Note: Our Drag Mats have a 1.00" square support tube on front pull edge to add support and so they mount correctly in our brackets. We recommend you do the same to your drag mat if you order this optional attachment.



PRRB-1925

Rock Basket For those who have rock or debris problems in their infields.



Attaches behind rear blade of leveler Material travels over rear blade and falls into basket. Debris catches in basket. Easy removal to empty.



OARH-2000 2" Receiver

Use when groomer not attached.





arrange the Tow Plate Assembly it's possible the receiver might not be able to be left on when groomer is attached.

OARH-0125 1-1/4" Receiver

Use when groomer not attached.





Note: Due to variances of how users can arrange the Tow Plate Assembly it's possible the receiver might not be able to be left on when groomer is attached

OAPH-0785

Pin Hitch (Drawbar) Use when groomer not attached. 7/8" Hole.





Note: Due to variances of how users can arrange the Tow Plate Assembly it's possible the pin hitch might not be able to be left on when groomer is attached.

PRGB-7200 High Speed Grading Bar

High Speed Grading Bar

Customers choose the Pro Groomer because they want their infields level. To provide this benefit the Pro Groomer performs at optimal speeds of 4 to 5 mph. There are times however when customers need a quicker way to groom infields. Customers such as those who:

- Run all day tournaments.
- Run double headers.
- Have lots of fields to cover.

How it Works "no tools needed engineering".

Attaches to the rear of the Leveler (same way the Chisel Scarifier attaches. Store upper "non-engaged" pins (where it will not contact the infield) until you need it. Quickly moves down to the lower "engaged" pins when you need it. When engaged the HS Grading Bar will contact the infield but the 2 bladed Leveler will not. Rear Broom (and Drag Mat if you have it) attach directly to the HS Grading Bar for finishing.



HS Grading Bar also

on back side for extra

finish affect.

includes Brush mounted

Tournaments: Run tournaments with tight schedules? Groom all of infields before the day's play with the normal 2 bladed Leveler. Between games, if time is short, cut prep time with high speed implement to quickly prep infields. After the day's games groom infields with the 2 blade Leveler Implement (normal process) to bring them back to optimal condition. Double Headers: Groom infields before the first game with the normal 2 bladed Leveler. Between games, if time is short, cut prep time using high speed implement to quickly prep infields. After final game groom with the 2 blade Leveler Implement (normal process) to bring them back to optimal condition. Lots of Infields to Maintain: Some fields are groomed the normal process every day - just not all of them. Alternate between using the Leveler or the HS Grading Bar to prep infields.

PABE-1800

Broom Extension Kit Kit converts a 72" wide Broom to 90" wide. Adds 9.00" extension at both ends of broom. Includes extension bars, 9" frame extensions. aluminum channels, brushes and hardware.



UNMATCHED Ingineering

Legendary Performance

Key Features & Benefits

- Levels Mixes Smoothens as you groom.
- Leveling Implement "Locks into position to guarantee leveling takes place".
- Completely adjustable to current infield conditions.
- Cuts High Areas and Fills Low Areas
- Reduces Need for Hand Raking
- Breaks up hard infields (optional accessories).
- Maintains safer playing surface
- Deters water puddling
- Controls Weeds
- More Lift Systems to choose from than any other manufacturer (all made in the USA).
- Controls Weeds
- More Lift Systems to choose from than any other manufacturer (all made in the USA).

- Heavy Duty Steel Construction
- Powder Coated finish
- Pull with a variety of towing machines
- No tools needed to adjust engineering
- Works on all infield materials
- Built Like a Tank!
- Easy to Use
- Affordable
- Saves Labor
- We do 99% of the Assembly.
- 36 Month Limited Warranty

No Tools Engineering! Needed

Level & Smooth Infields!
We Guarantee It!

QA Quick Attach 2 Switch Control System How it Works

How it Works. This one of a kind wiring system splits 12v power from the Tow Machine battery in 2 directions:

1) to Dash Mounted Rocker Switch for control while driving and grooming.

2) to SwitchBox mounted at rear of Tow Machine for lift and lower control while attaching or unhooking the groomer.

Split power gives the user more control. If the system only had a dash mounted switch it would be difficult to attach or unhook the groomer to the quick attach system at rear. This system allows both switches to operate the cylinder (actuator) on the groomer.

Both switches send signal to the Split "Y" Harness and on to the cylinder for control. The rear "Break Away" cord is connected to the Tow Plate wire each time the groomer is attached or unhooked. It's just like connecting trailer or camper wires to a pickup during use.



WARRANTY (All Groomers from Heying Company)

Heying Company machines carry the following limited warranty, from date of possession to the end user, on parts and workmanship, and to be free of defects, under normal and intended use and service conditions, of:

3 years parts and workmanship on Heying Company manufactured parts.

One (1) Year on parts not manufactured by Heying Company, including but not limited to: Wheels, brushes, electrical cylinder (actuator), electric system parts, wireless remote control systems, switches, batteries, chargers, etc.

Excluded is this warranty is Normal Wear and Tear on Parts resulting from natural and intended use.

Heying Company's obligation under this warranty is limited to replacement or repair at the manufacturer's option.

Proof of purchase must accompany any and all warranty claims to Heying Company.

This warranty does not extend to any product or damage to a product caused by, or attributed to freight damage, abuse, misuse, improper or abnormal usage, improper storage or changes and repairs unauthorized by Heying Company including to towing machines.

All freight damage claims must be made immediately and directly to the freight carrier by the purchaser or end user. It is not the responsibility of Heying Company to report damaged freight to freight companies. We guarantee that all shipments leave our facilities free from damage.

Heying Company is not liable for direct or indirect, special or consequential damages arising from, or in connection with, the use or performance of the product or damages with respect to any economic loss, personal injury, loss or damage to property, loss of revenues or profits, or loss of enjoyment.

Any full machine, assembly or individual part returned to Heying Company for refund, replacement or repair must have sufficient proof of purchase included, prior written authorization from Heying Company, be packaged as instructed by Heying Company, and have all freight charges prepaid.

Product returns are subject to re-painting and re-stocking charges.

No other warranty beyond that specifically stated above is authorized or intended by Heying Company.

Choosing a tow machine is the sole responsibility of the user. User should always consult with the towing machine manufacturer for towing capacity and suitability. Heying Company makes no claim and carries no responsibility as to the ability or capacity of any towing machine to be used.

Participants acknowledge that operating motorized vehicles, with towed or attached equipment, can be an extreme test of a person's physical and mental limits and carries with it the potential for death, serious injury and property loss. The risks include, but are not limited to, those caused by terrain, vehicular traffic and the actions of other people including, facilities, temperature, weather, and physical and mental fitness. These risks are not only inherent to equipment operators but are also present for volunteers and anyone else desiring to participate in these activities. Participants acknowledge, agree and represent that they will inspect the equipment to be used or operated by him/her. Participant agrees and warrants that, if at any time, he/she is in or around the equipment that they will immediately advise appropriate officials of such, and if necessary, leave the area or equipment and/or refuse to further participate in these activities if they are unable to successfully do so.

Acknowledgment and Assumption of Risk. Release of Liability: Indemnification.

Rear attach groomers are designed to attach directly to a customer's vehicle, tractor, etc. (and will not include a wheeled frame or tongue for pulling). The desire for direct attach groomers comes from customers needing "convenience". Even though these types of groomers could prove to be somewhat less effective there are customers who understand this and are willing to sacrifice some function to gain convenience. Examples of vehicles used for "direct attach groomers". Utility vehicles like the JD Gator TX. UTV's, Side by Sides, Small Tractors, etc. Heying Company is not responsible for damage or harm to vehicles, or to person's operating the vehicle and / or groomer. Customer agrees that they are solely responsible to attach to and operate their vehicle or Tow Machine, they understand they are responsible to assure the safety of operators, and that they willingly attach this groomer to their tow machine with full knowledge that they are responsible to make sure it will not cause damage to their vehicle or any person operating the vehicle. Customer acknowledges that by ordering a groomer they have read and understand all aspects of their responsibility of pulling, attaching, and operating all equipment.

Release of Liability; Indemnification; Acknowledgement of Risk. Participant hereby waives, releases and discharges, on behalf of Participant and Participant's executors, administrators, heirs, next of kin, successors and assigns, Heying Enterprises and authorized dealers, and their respective directors, officers, employees, volunteers, agents from any and all liability for customer's death, disability, personal injury, property damage, property theft, lost income or any other losses, costs or actions of any kind whatsoever, which hereafter may directly or indirectly accrue to customer through training or participating in the act of use of Heying Equipment and their Tow Vehicles. Customer agrees to indemnify and hold the Releasees harmless from and against any and all liability, loss, damage or injury as well as all costs and expenses (including attorneys' fees and costs of any suit related thereto), suffered or incurred by Releasees, to the extent arising from any of customer actions whatsoever whether now or in the future, including but not limited to negligent, intentional or reckless misconduct, acts or omissions. Participant understands that there are inherent hazardous risks associated with the operation of equipment which could include serious injury or death, and customer freely assumes the risk of any and all injuries that customer may sustain while using this equipment. Customer agrees that no person with insufficient physical fitness, alertness, sobriety, vision, or medical ability shall operate the equipment and that all operators shall have adequate training before being allowed to operate said equipment. Governing Law. Except to the extent that this Agreement may be governed by any federal law, this Agreement shall be governed by, construed and interpreted under, and enforced exclusively in accordance with the laws of the State of Iowa in the United States.

